


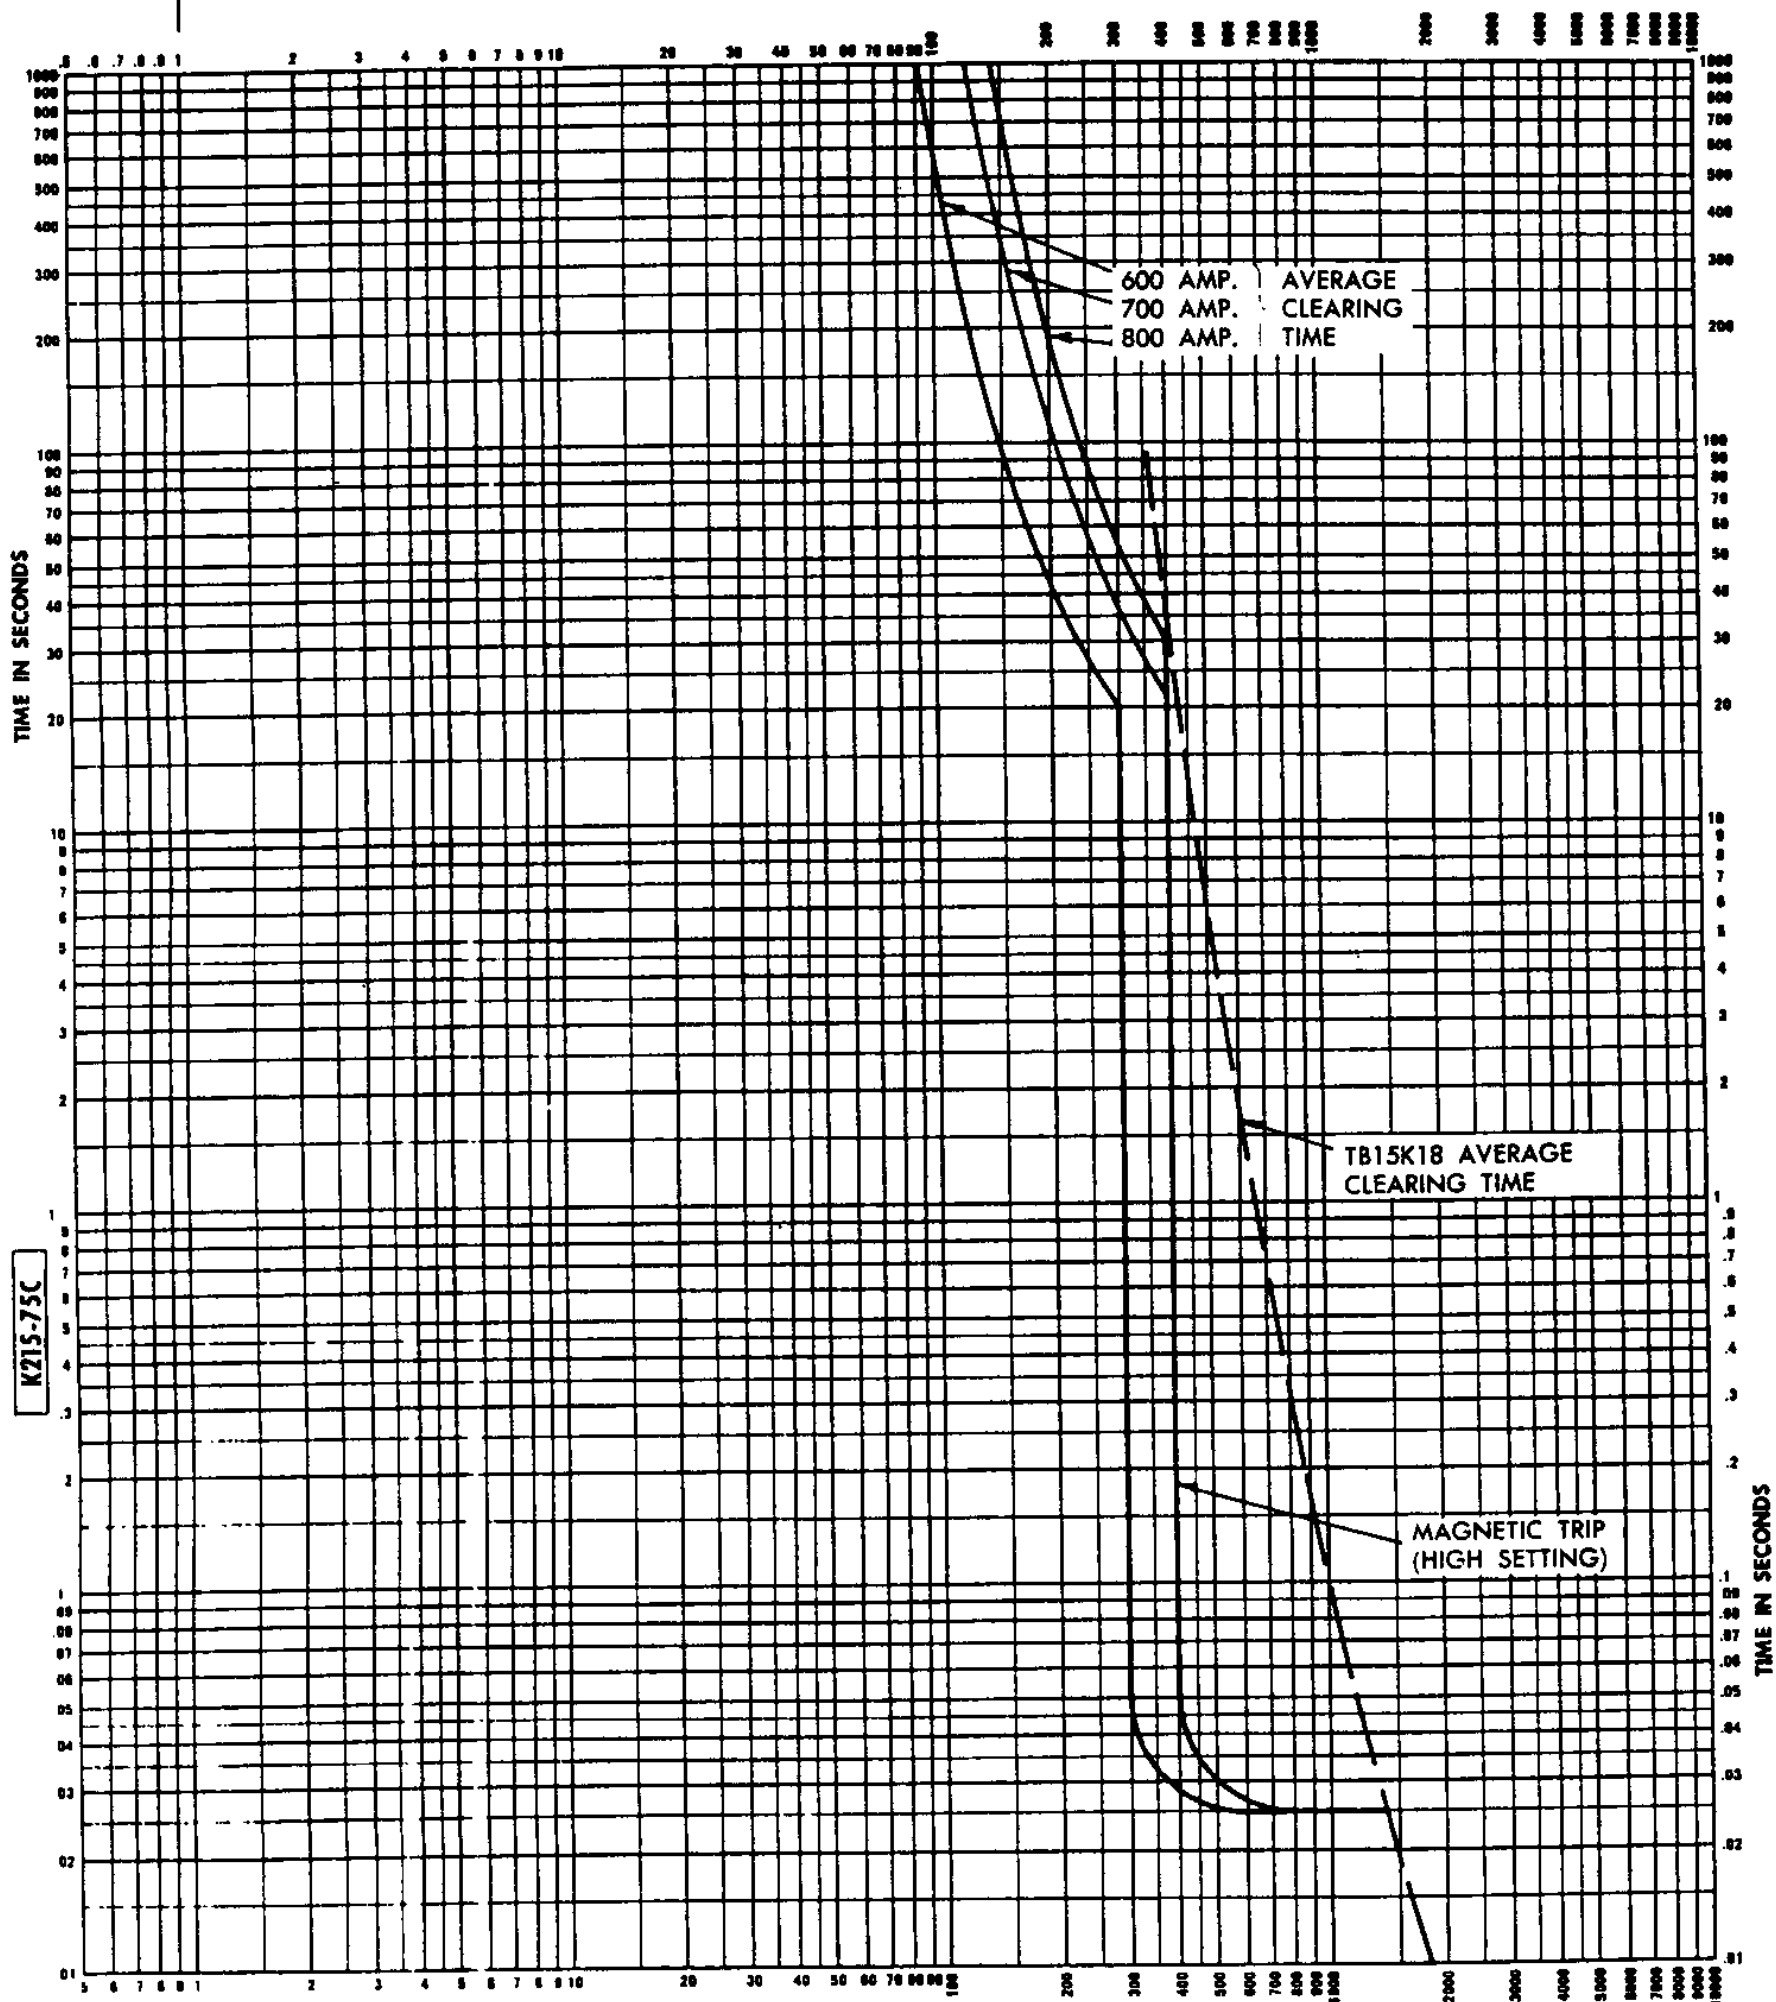

GENERAL ELECTRIC	INTEGRALLY FUSED MOLDED CASE CIRCUIT BREAKER	K215-75C
Current Ratings 600, 700 and 800 Amperes Voltage Ratings 600 Volts A-c (250 Volts D-c) Frequency Ratings D-c or 60 Cycles	TRI-BREAK LINE TYPE TB8 (600-800 AMPERES) Thermal trip, Magnetic trip & Current Limiter Characteristics Time vs RMS Current	Adjustments Long time delay thermal trip, not adjustable. Instantaneous magnetic trip, continuously ad- justable, set on HI.

REV. 10-17-67

CIRCUIT PROTECTIVE DEVICES DEPARTMENT, PLAINVILLE, CONNECTICUT