




MULTIPLES OF RATING PLUG

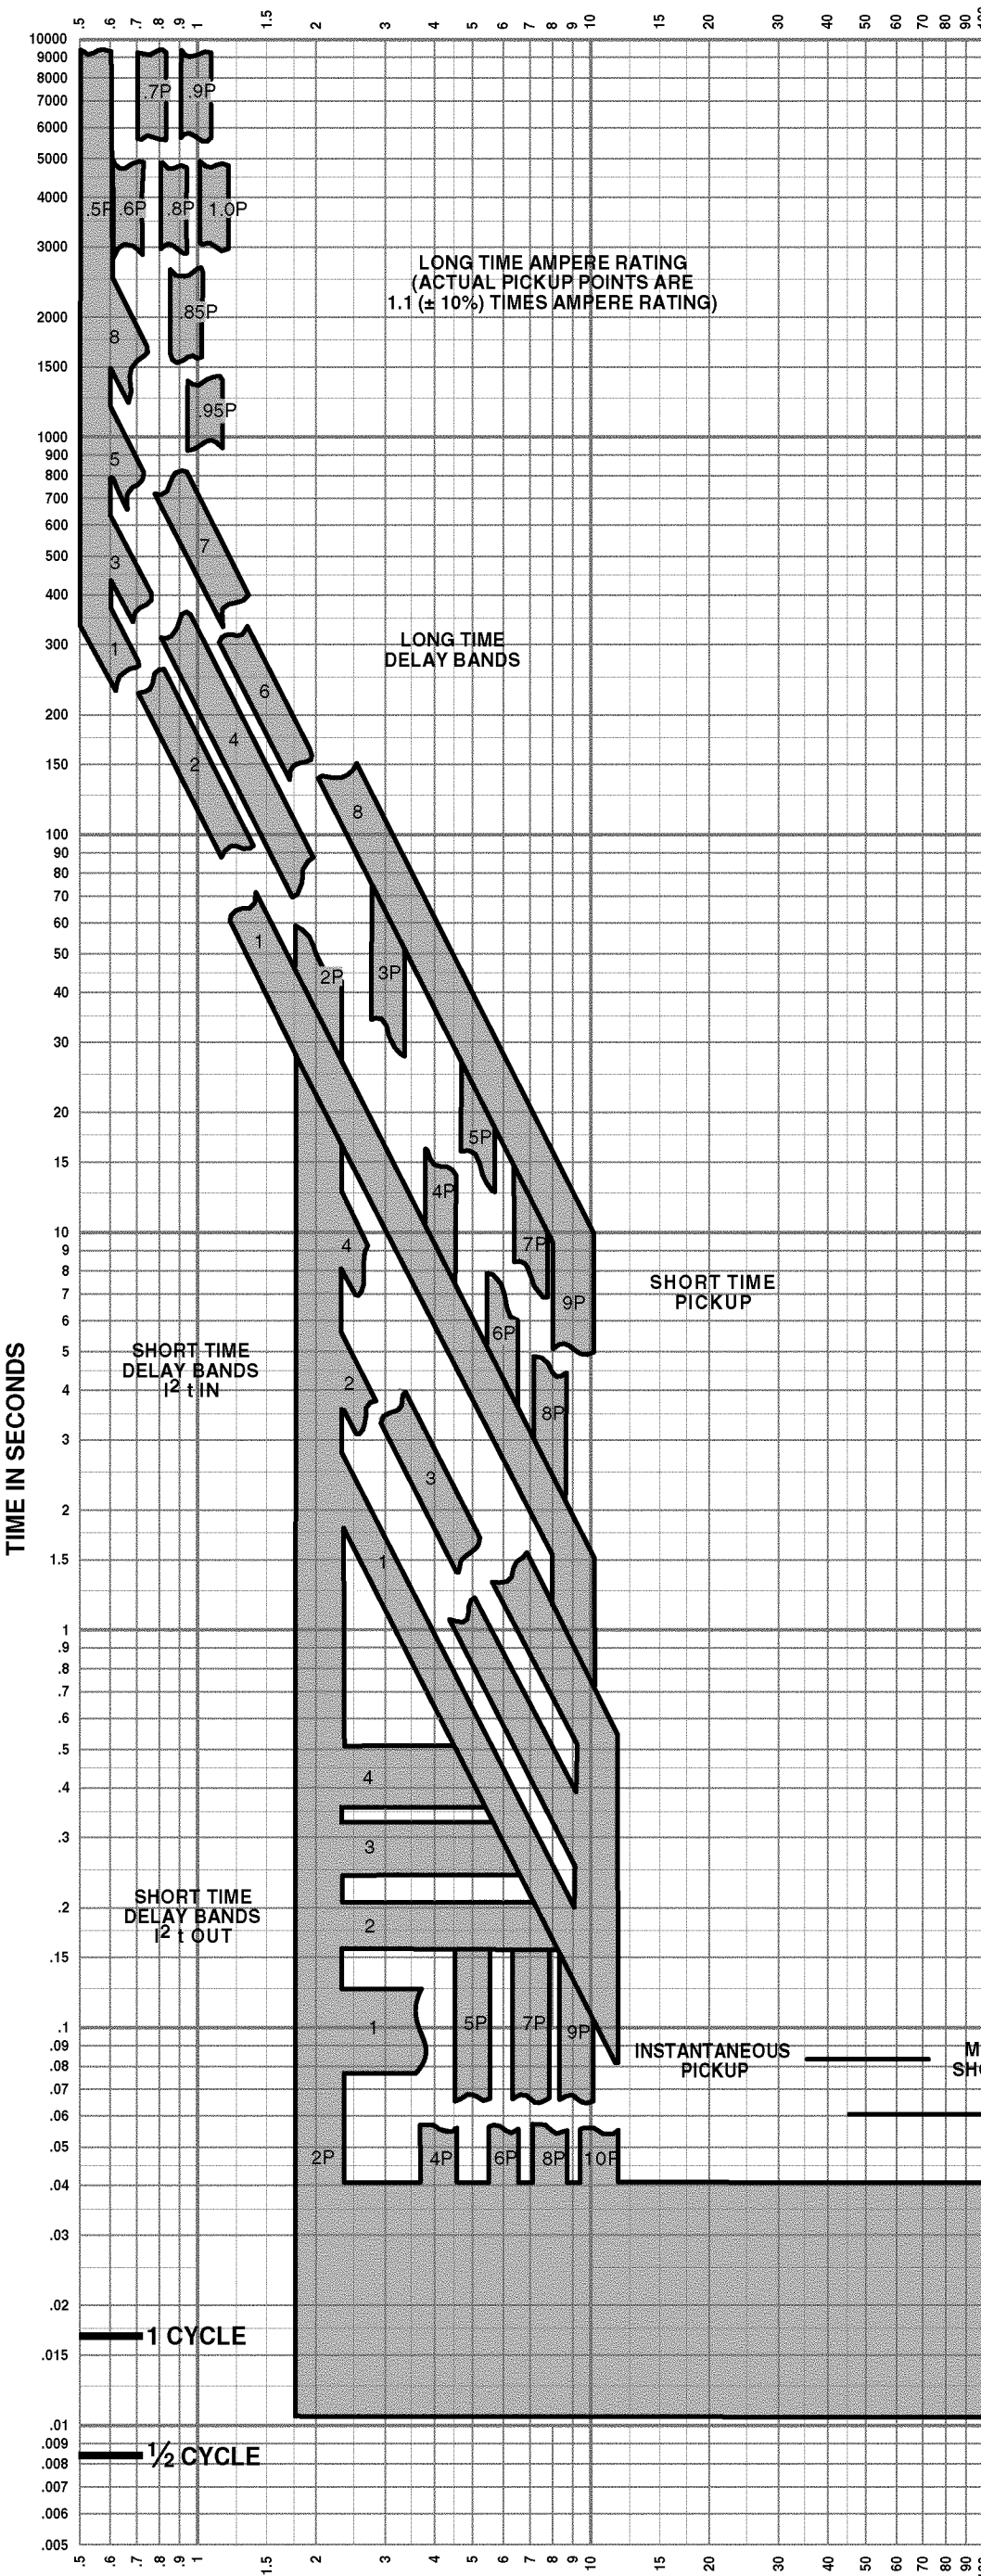

NE FAMILY MOLDED CASE CIRCUIT BREAKERS
CHARACTERISTIC TRIP CURVE NO. 671-1

MICROLOGIC® trip unit with adjustable long time ampere rating and delay (L); short time pickup and delay (S); instantaneous pickup (I).


CIRCUIT BREAKER INFORMATION			
Circuit Breaker Prefix	BreakerFrame	Maximum AC Voltage	Number of Poles
NE NEC	1200/1250 1200/1250	600 600	2, 3 2, 3

AVAILABLE RATING PLUGS	
Frame	Rating Plugs (Amperes)
1200/1250	600, 630, 700, 800, 900, 1000, 1200, 1250

This curve is to be used for application and coordination purposes only. Curves apply from -20°C to +50°C ambient.

NOTE 1 Maximum unrestrained short time delay at "I²t out" switch settings Band 1

NOTE 2 Maximum unrestrained short time delay at "I²t out" switch settings Bands 2-4 and "I²t in" switch settings 1-4.

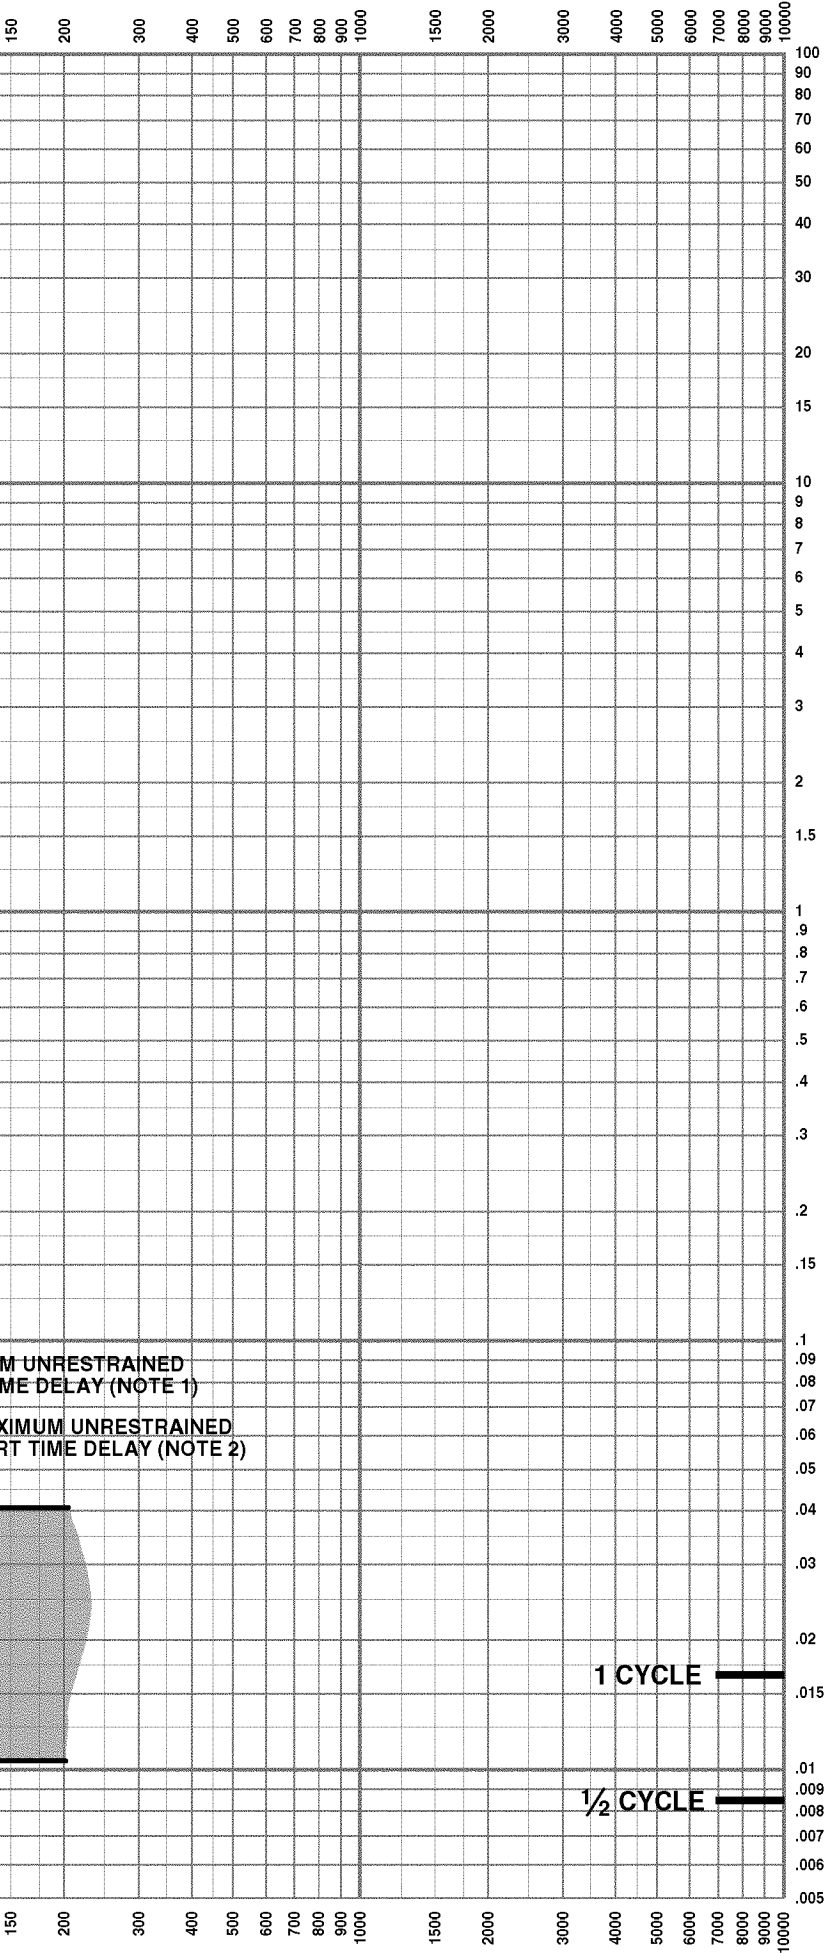

MULTIPLES OF RATING PLUG