




MULTIPLES OF RATING PLUG

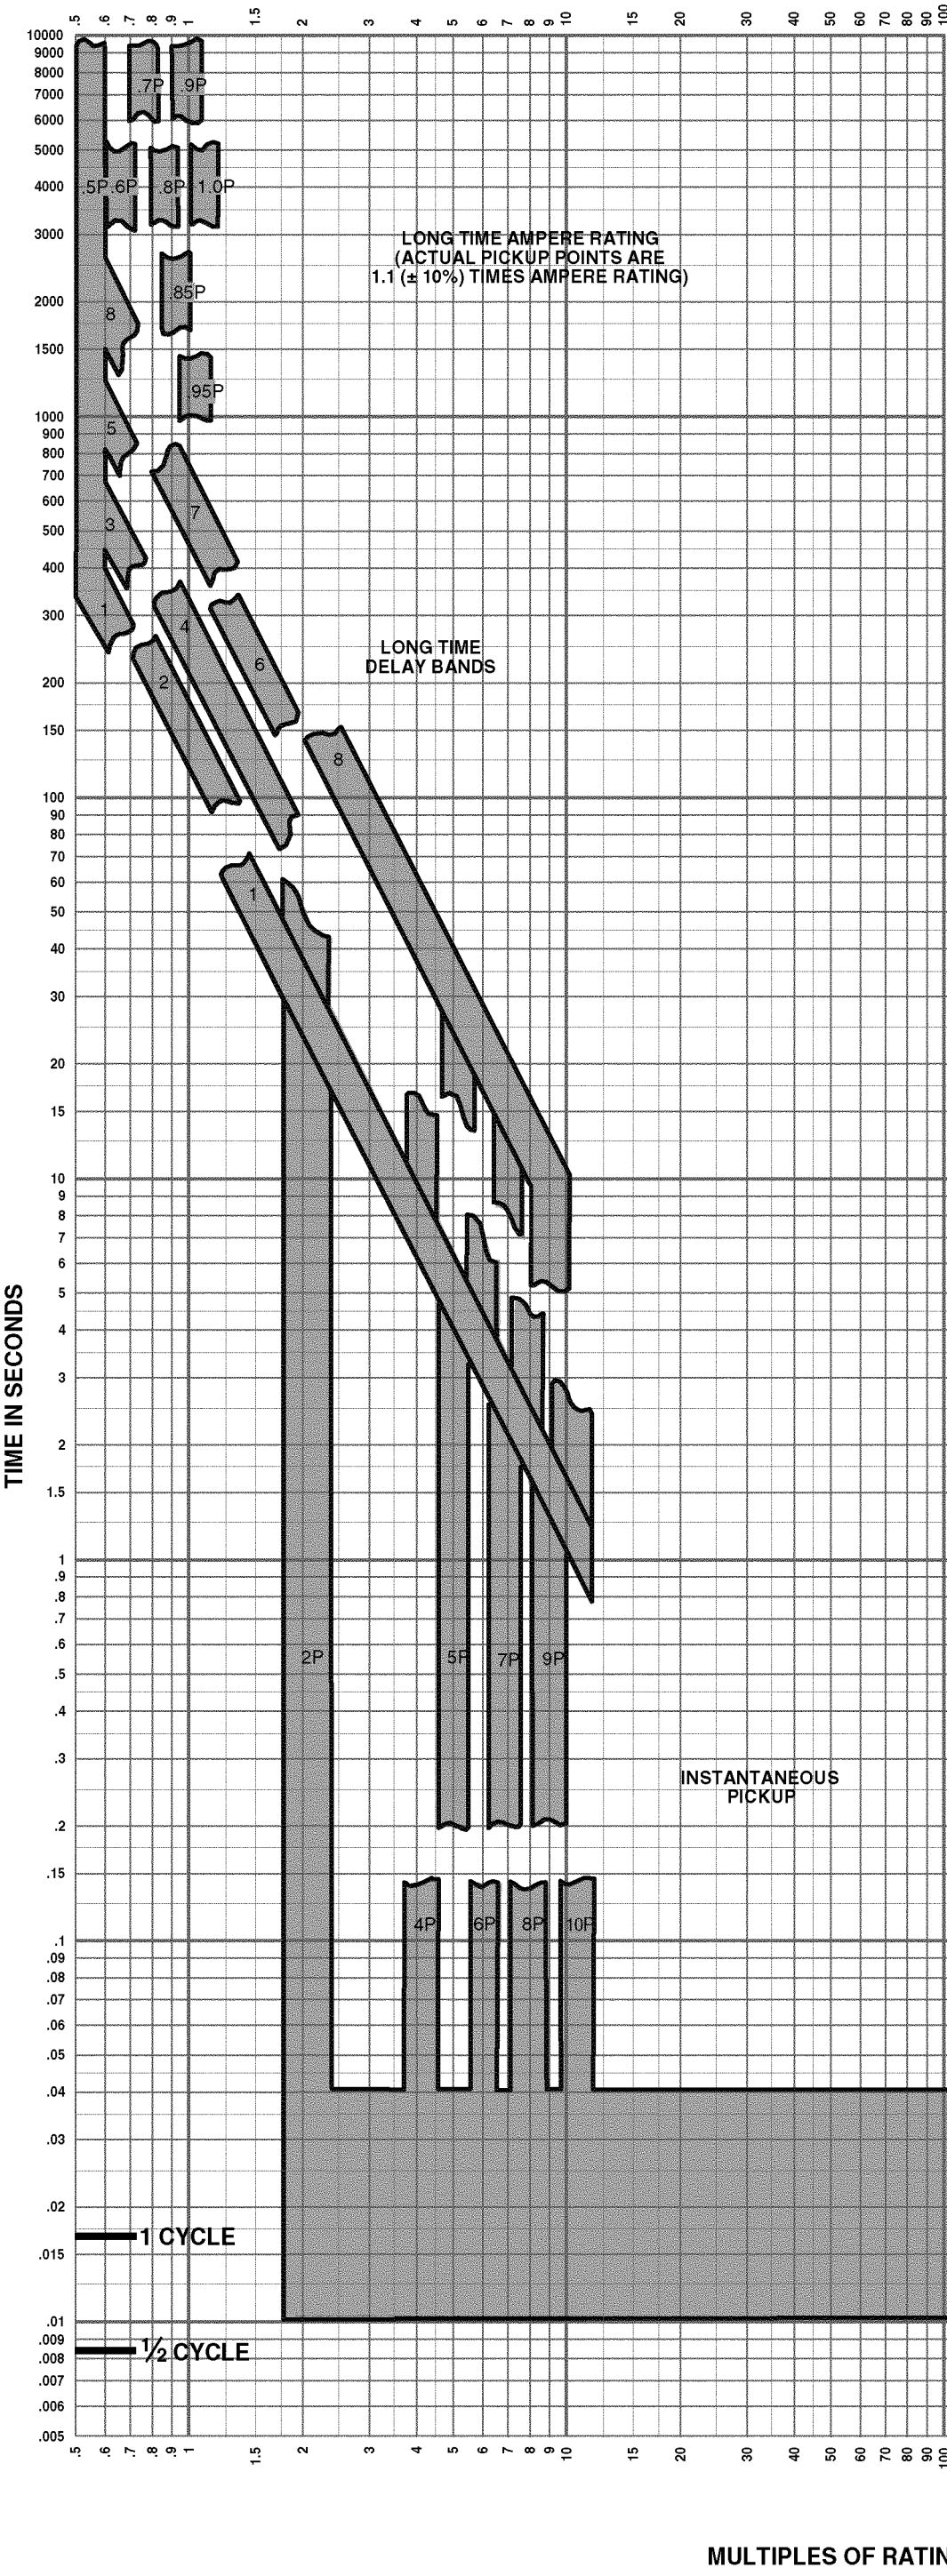


NE FAMILY MOLDED CASE CIRCUIT BREAKERS
CHARACTERISTIC TRIP CURVE NO. 671-3

MICROLOGIC® trip unit with adjustable long time ampere rating and delay (L); instantaneous pickup (I).

CIRCUIT BREAKER INFORMATION			
Circuit Breaker Prefix	BreakerFrame	Maximum AC Voltage	Number of Poles
NE NEC	1200/1250 1200/1250	600 600	2, 3 2, 3

AVAILABLE RATING PLUGS	
Frame	Rating Plugs (Amperes)
1200/1250	600, 630, 700, 800, 900, 1000, 1200, 1250

This curve is to be used for application and coordination purposes only. Curves apply from -20° C to +50° C ambient.

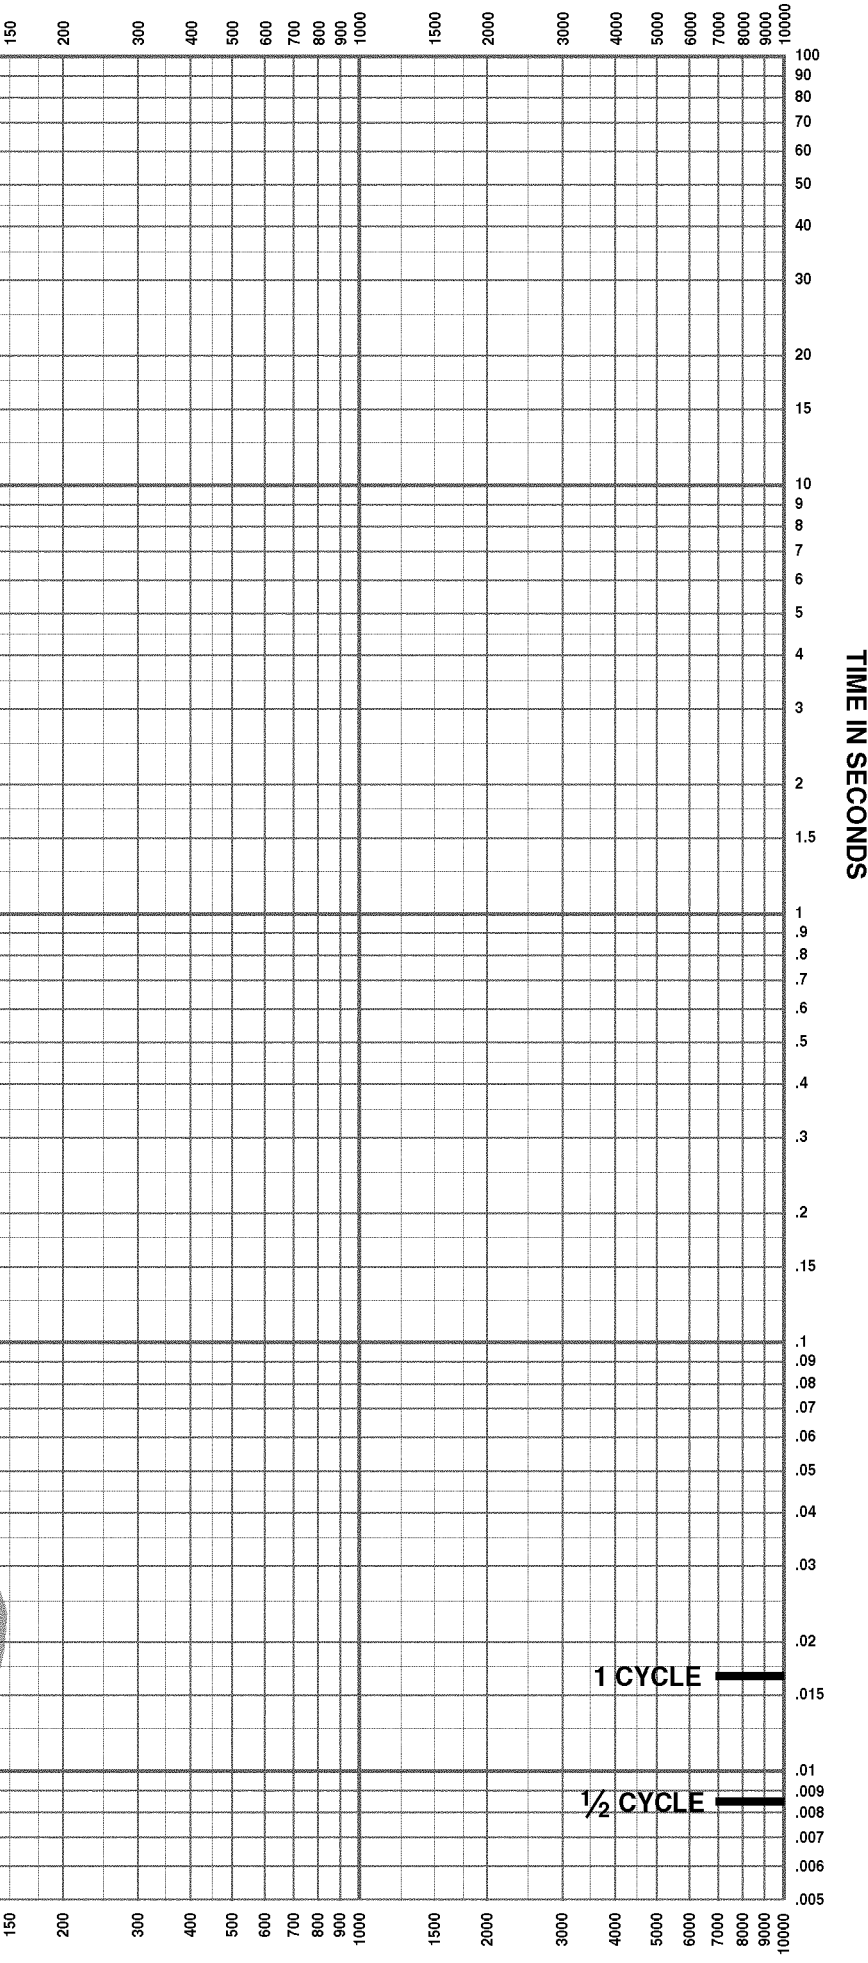

MULTIPLES OF RATING PLUG